


SILENCER MUFFLERS (Aluminum Body)

Unique design provides superior noise reduction to meet O.S.H.A. standards with minimum effect on air efficiency. Aluminum body and screen element resists rust, corrosion and melting.

Pipe Size	Part Number	Overall Length	Dia	Approx. Wt. Lbs.
1/8	80510	2 1/8	13/16	.07
1/4	80520	2 1/4	13/16	.07
3/8	80530	3 7/16	1 1/4	.17
1/2	80540	3 9/16	1 1/4	.17
3/4	80560	4 11/16	1 1/2	.29

Maximum operating pressure 300 psi
Operating temperatures 40°F to 160°F

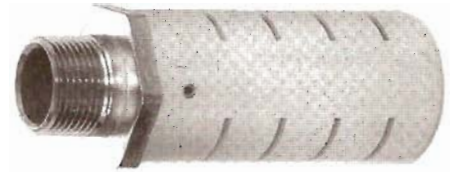

SINTERED BRONZE MUFFLER-FILTER

Compact design effectively diffuses air and muffles noise from valve exhaust ports. Noise reduction meets O.S.H.A standards. Muffler filters also protect valves, airtools and air components from dirt and other foreign matter. Standard 40 micron element.

*Furnished with gasket

Pipe Size	Part Number	Overall Length	Hex	Approx. Wt. Lbs.
10-32*	80600	21/32	5/16	.01
1/8	80610	7/8	7/16	.02
1/4	80620	1 1/4	9/16	.04
3/8	80630	1 1/2	11/16	.16
1/2	80640	1 7/8	7/8	.10
3/4	80660	2 1/4	1 1/16	.18

Maximum operating pressure 300 psi
Operating temperatures 40°F to 300°F



MUFFLER SPEED CONTROLS

Provide dual job of metering exhaust air to control cylinder or tool speed and muffle noise to meet O.S.H. standards. They are capable of a wide range of flow settings and are equipped with lock nuts to maintain setting. Standard 40 micron element.

Pipe Size	Part Number	Body Length	Overall Length	Hex	Approx. Wt. Lbs.
1/8	80210	29/32	1 5/16	1/2	.07
1/4	80220	1 3/16	1 9/16	9/16	.09
3/8	80230	1 1/4	1 5/8	11/16	.14
1/2	80240	1 17/32	2	7/8	.25
3/4	80260	1 3/4	2 3/8	1 1/16	.42

Maximum operating pressure 300 psi
Operating temperatures 40°F to 300°F



BREATHER VENTS

Low profile vents have many applications for vacuum relief or pressure equalization on gear boxes, oil tanks or reservoirs. Also for single acting cylinder ports. 40 micron standard element.

Pipe Size	Part Number	Overall Length	Hex	Approx. Wt. Lbs.
1/8	80310	7/16	7/16	.01
1/4	80320	5/8	9/16	.02
3/8	80330	3/4	11/16	.04
1/2	80340	7/8	7/8	.06

Maximum operating pressure 150 psi
Operating temperatures 40°F to 300°F



BREATHER VENTS

Designed specifically for the protection of small air tools such as impact wrenches, nut runners, and screw drivers. Will effectively reduce downtime and prevent costly repairs in addition to expanding their life. May also be used for fluids such as oil or gasoline. Standard element is 40 micron for minimum back pressure.

Pipe Size	Part Number	Overall Length	Hex	Approx. Wt. Lbs.
1/8	80410	2 3/16	3/4	1.25
1/4	80420	2 5/16	3/4	1.25
1/2	80440	3 1/4	1 1/2	7.40
3/4	80460	3 1/4	1 1/2	7.40

Maximum operating pressure 500 psi
Operating temperatures 40°F to 200°F

